


Access Reader G2 Pro

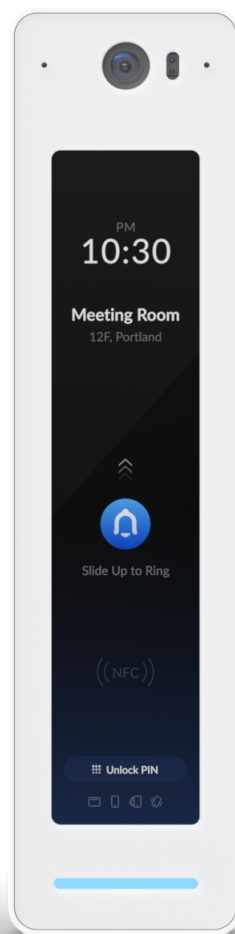

Mechanical

Dimensions	160 x 40.4 x 40.55 mm (6.3 x 1.59 x 1.6")
Weight	136 g (4.8 oz)
Enclosure material	Polycarbonate, glass
Mounting material	Aluminum alloy
Mounting	Wall, gang box
Weatherproofing	IP55

Hardware

Networking interface	(1) 10/100/1,000 MbE RJ45 port
Connectivity	BLE 4.2 NFC
Power method	PoE
Supported voltage range	48V DC
Max. power consumption	5W
ESD/EMP protection	Air: ±15kV, contact: ±8kV
Sensor	ToF sensor
Camera	4096 x 3072, 12 MP, 30 FPS
Microphone	Yes
Speaker	(1) 4 ohm, 1.5W
LEDs	R/G/B/W Flash
Button	(1) Factory-reset
NFC frequency	13.56 Mhz
NFC read range	< 30 mm
NFC standards	ISO 14443A, 14443B, 15693
NFC technology	NFC Tag 1,2,3,4,5 MIFARE Classic MIFARE Plus MIFARE Ultralight MIFARE DESFire
Operating temperature	-10 to 40° C (14 to 104° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

